

Specifications

Material

 Microsurfaced impact acrylic for reverse engraving

Finish

- » Matte non-glare
- » Gloss ■

Minimum Sheet Size

» 24" x 48¾" (610 x 1238mm)

Thickness 2-ply

- » 1/16" (1.6mm)
- » 1/8" (3.2mm) A
 Use 942 as first digits in item code.
 (Gauges are approximate.)

Usage

- » Interior signage
- » Exterior signage*
- » Personal identification

Engraving Method

- » Laser
- » Rotating carbide

Cutting Depth

» .003" (.08mm)

Fabrication

- » Scores
 - res » Screen prints » Hot stamps
- » Saws» Drills
- » Back-filling
- » Shears» Bevels
- » Back-lighting» UV stable» Outdoor
- » Bonds» Outdoor» Laser vector cutsweatherable
- » Heat bendable
- » Permits fine detail engraving

Visit www.rowmark.com for Rowmark's complete line of products for rotary engraving, laser engraving and sublimation.

Find answers to all your questions in the Technical Help section. Be sure to check out support tools under the Sales Tools and Downloads sections.

*Some Reverse LaserMark® foils are not recommended for applications in which UV stability is a requirement.

To request a sample or promotional literature, please call 1-877-ROWMARK (419-429-3160) or email samples@rowmark.com. For technical assistance, call 1-877-ROWMARK (419-429-3160), visit www.rowmark.com or email inquiries@rowmark.com.

Can't find exactly what you're looking for? Contact your authorized Rowmark distributor or speak with one of our customer service specialists at 1-800-243-3339 (419-425-2407).





Reverse LaserMark® Sign Kit

item #9035

You may place your Reverse LaserMark® Sign Kit order at www.rowmark.com, or fabricate the signs on your own using the file found under the downloads section of our website.
















rowmark.com / 1.877 ROWMARK / samples@rowmark.com

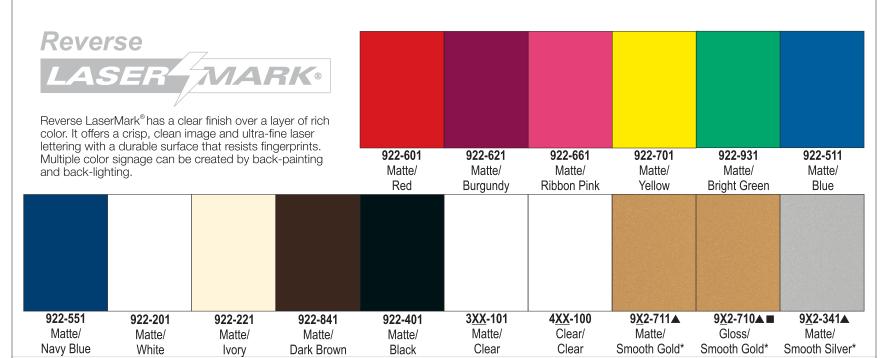

*Some Reverse LaserMark® foils are not recommended for applications in which UV stability is a requirement.

9X2-340 ▲■ Gloss/ Smooth Silver*

